




特長 FEATURES

- 偏芯構造により、振れ精度の向上。
- Run-out of the cutting tool is improved by the eccentric ID.

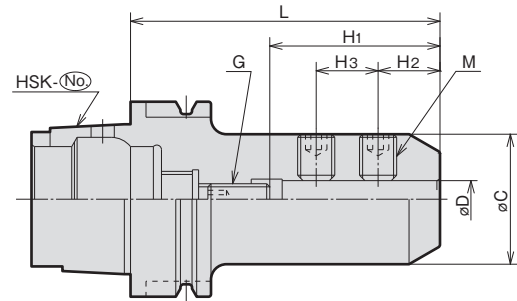

MODEL	CODE	øD(H6)	L	øC	H1		H2	H3	M	G	N/W (kg)	
					MIN.	MAX.						
HSKA50	-SLA06-075	25710	6	75	30	18	28	13	-	M 6	M 5	0.7
	-SLA08-080	25720	8	80	35	23	33	15		M 8	M 6	0.8
	-SLA10-090	25730	10	90	42	25	38	18		M10	M 8	0.9
	-SLA12-100	25740	12	100	48	30	43	20		M12	M10	1.1
	-SLA16-120	25750	16	120	50	35	50	24		M14	M12	1.7
	-SLA20-140	25760	20	140	61	55	70	25		M16		2.0
HSKA63	-SLA06-075	26710	6	75	30	18	28	13	-	M 6	M 5	0.9
	-SLA08-080	26720	8	80	35	23	33	15		M 8	M 6	1.0
	-SLA10-090	26730	10	90	42	25	38	18		M10	M 8	1.1
	-SLA12-100	26740	12	100	48	30	43	20		M12	M10	1.3
	-SLA16-100	26750	16	100	50	35	46	24		M14	M12	1.6
	-SLA20-120	26760	20	120	61	55	65	25		M16		2.5
	-SLA25-130	26770	25	130	72	65	75	24		M18		3.0
	-SLA32-140	26780	32	140	72	65	75	24		25	M20	4.2
HSKA100	-SLA06-085	27710	6	85	30	18	28	13	-	M 6	M 5	2.2
	-SLA08-090	27720	8	90	35	23	33	15		M 8	M 6	2.3
	-SLA10-100	27730	10	100	42	25	38	18		M10	M 8	2.4
	-SLA12-110	27740	12	110	48	30	43	20		M12	M10	2.6
	-SLA16-110	27750	16	110	50	35	50	24		M14	M12	2.9
	-SLA20-130	27760	20	130	61	55	70	25		M16		3.8
	-SLA25-140	27770	25	140	72	65	75	24		25		M18
	-SLA32-150	27780	32	150	72	65	80	24		28	M20	5.5

注：1. クーラントパイプは付属されております。(固定式)
2. フラット付ストレートシャンク刀具をご使用下さい。

NOTE : 1. Coolant pipe is included.
2. For endmill of straight shank with flat.

ご注文例 ORDERING EXAMPLE

① HSKA50 - SLA ② 06 - ③ 075 ④

① シャンクサイズ Shank Size
② 呼称 Holder's Name
③ 刃具シャンク径 øD Cutter's Shank Dia.
④ GL長さ L G.L. Length